SUBSTITUTE FORM PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER
12758-024001

U.S. APPLICATION NO. (If Known, see 37 CFR 1.5)
09/806646

INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/DE99/03249	8 October 1999	8 October 1998

TITLE OF INVENTION
METHOD AND RADIO COMMUNICATION SYSTEM FOR REGULATING POWER BETWEEN A BASE STATION AND A SUBSCRIBER STATION

APPLICANT(S) FOR DO/EO/US
Michael Benz, Anja Klein, Armin Sitte, Thomas Ulrich, Volker Sommer, Reinhard Kohn, Jorn Krause, Jean-Michel Traynard, Meik Kottkamp, Michael Farber, Stefan Oestreich, Sebastian Obermanns, Holger Landenberger and Franz Goldhofer

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
   a. ☒ is attached hereto (required only if not communicated by the International Bureau).
   b. ☐ has been communicated by the International Bureau.
   c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
   a. ☐ are attached hereto (required only if not communicated by the International Bureau).
   b. ☐ have been communicated by the International Bureau.
   c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
   d. ☐ have not been made and will not be made.
8. ☐ An English language translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern other documents or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
    ☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:
    ☐
    ☐

CERTIFICATE OF MAILING BY EXPRESS MAIL Express Mail Label No EL258934554US

I hereby certify under 37 CFR §1 10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231

4/2/01 — Date of Deposit
Signature
Kevin Gorman — Typed Name of Person Signing

JC08 Rec'd PCT/PTO 02 APR 2001

U.S. APPLICATION NO. (IF KNOWN)	INTERNATIONAL APPLICATION NO.	ATTORNEY'S DOCKET NUMBER
09/806646	PCT/DE99/03249	12758-024001

17. ☒ The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)- (5)):

	CALCULATIONS PTO USE ONLY	
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **$1000**		
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **$860**		
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO..... **$710**		
International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)..... **$690**		
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)..... **$100**		
ENTER APPROPRIATE BASIC FEE AMOUNT =	$860.00	
Surcharge of **$130** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	$0.00	

Claims	Number Filed	Number Extra	Rate		
Total Claims	14 - 20 =	0	x **$18**	$0.00	
Independent Claims	3 - 3 =	0	x **$80**	$0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ **$270**	$0.00	
TOTAL OF ABOVE CALCULATIONS =				$860.00	
☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				$0.00	
SUBTOTAL =				$860.00	
Processing fee of **$130** for furnishing the English Translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f))				$0.00	
TOTAL NATIONAL FEE =				$860.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31).**$40.00** per property +				$0.00	
TOTAL FEES ENCLOSED =				$860.00	
				Amount to be refunded:	$
				Charged:	$

a. ☒ A check in the amount of $860.00 to cover the above fees is enclosed.
b. ☐ Please charge my Deposit Account No. 06-1050 in the amount of $0.00 to cover the above fees. A duplicate copy of this sheet is enclosed.
c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Paul A. Pysher
FISH & RICHARDSON P.C.
225 Franklin Street
Boston, MA 02110-2804
(617) 542-5070 *phone*
(617) 542-8906 *facsimile*

SIGNATURE :

Paul A. Pysher
NAME

40,780
REGISTRATION NUMBER

20223251.doc

Description

Method and radio communication system for controlling power between a base station and a subscriber station

The invention relates to a method and radio communication system for controlling power between a base station and a subscriber station, especially for CDMA transmission methods in broadband transmission channels.

In radio communication systems, information (for example voice, picture information or other data) is transmitted with the aid of electromagnetic waves via a radio interface. The radio interface relates to a connection between a base station and subscriber stations, where the subscriber stations can be mobile stations or stationary radio stations. The electromagnetic waves are radiated at carrier frequencies which are in the frequency band provided for the respective system. For future radio communication systems, for example the UMTS (Universal Mobile Telecommunication System) or other third-generation systems, frequencies are provided in the frequency band of approx. 2000 MHz.

For the third generation of mobile radio, broadband radio interfaces (B = 5 MHz) are provided which use a CDMA (code division multiple access) transmission method for differentiating between different transmission channels. The CDMA transmission method requires a continuous transmission power control which, as a rule, functions for both directions of transmission in the form of a closed control loop. For the up-link (the radio transmission from the mobile station to the base station), the base station evaluates transmissions of the mobile station with respect to the transmission quality and transmits back to the subscriber station a transmission power correction instruction which is used by the subscriber

station for controlling transmission power for subsequent transmissions.

From ETSI STC SMG2 UMTS-L1, Tdoc SMG2 UMTS-L1 221/98 of 25.8.1998, pages 29-30, it is known to specify a fixed increment for increasing or reducing the transmission power, which can only vary from radio cell to radio cell. Thus, the increment of transmission power correction is a static parameter. Specifying the increment statically, however, ignores certain dynamic characteristics of the transmission performance via the radio interface which, from time to time, causes an unnecessarily high interference in the radio communication system if the transmission power is too high or a transmission quality which is too poor if the transmission power is too low. It is an object of the invention to improve the transmission performance. This object is achieved in accordance with the method having the features of claim 1 and the radio communication system having the features of claim 16. Advantageous further developments can be found in the subclaims.

According to the invention, the transmissions of a second radio station are received in a first radio station and a transmission power correction instruction for the transmission power of the second radio station is determined. The transmission power correction instruction is transmitted during a subsequent transmission of the first radio station to the second radio station whereupon the latter takes the transmission power correction instruction into consideration for adjusting the transmission power during one of its subsequent transmissions. In contrast to the prior art in broadband CDMA transmission methods, it is not a time-invariant and fixed increment which is used in changing the transmitting power but a transmission power correction instruction which is related to a variable increment of the transmission power adjustment. The variable increment is set by the radio stations in a subscriber-dependent and time-dependent manner.

The larger the increment, the faster wrong transmission power adjustments will be corrected, but at the cost of more inaccurate control. If the increment is small, the control is more accurate but the delay is greater until large deviations are corrected. Due to the variable

increment, the control can be adapted to all transmission conditions in a subscriber-dependent and time-dependent manner and the control can thus be improved. Improved control produces reduced interference and a transmission quality which is guaranteed for all connections.

According to an advantageous further development of the invention, a transmission condition for the connection is evaluated repetitively in time in the radio stations and the increment is increased or reduced with changes in the transmission condition. The transmission condition is one or a combination of the following parameters which cause a change in the control loop for the transmission power adjustment:

- an interruption in a continuous transmission mode for measuring purposes (slotted mode),
- a change in the asymmetry of utilization of radio resources of the radio interface in TDD mode between up-link and down-link,
- the speed of movement of the subscriber station,
- the number of transmitting and/or receiving antennas used,
- a length of time averaging of the signal evaluation at the receiver end,
- a length of the channel impulse response used during the signal detection,
- number of base stations which are in radio contact with the subscriber station in a macro-diversity transmission method.

By changing these transmission conditions, the control loop is interrupted for a certain time or, respectively, the time of interruption is changed or the quality of detection of the transmitted information is abruptly changed. These conditions can be met better by means of the variable increment.

The control method is particularly suitable for radio interfaces which use a CDMA

subscriber separation method in broadband transmission channels and in which a multiplicity of transmission conditions is possible which change the

control loop. Typical applications are the FDD (frequency division duplex) and TDD (time division duplex) mode in third-generation mobile radio systems. The control applies to up-link and down-link so that the first radio station is either the base station or the subscriber station.

The increment to be used is obtained from signaling, implicitly coded within the transmission power correction instruction transmitted or according to a correspondence table or calculation rule linking the different transmission conditions with the increments to be used. Combinations of these measures can also be used. The exemplary embodiments show which specifications are advantageous for which changes in transmission condition.

Exemplary embodiments of the invention will be explained in greater detail with reference to the attached drawings, in which:

Figure 1 shows a diagrammatic representation of a radio communication system,

Figure 2 shows a determination of the increment in "slotted mode",

Figure 3 shows a determination of the increment in the case of different conditions of asymmetry,

Figure 4 shows a determination of the increment in the case of different speeds of the mobile station,

Figure 5 shows a determination of the increment in the case of the use of a reception diversity method,

Figure 6 shows a determination of the increment in the case of "soft handover" of a mobile station, and

Figure 7 shows a control loop for adjusting the transmission power.

The mobile radio system shown in Figure 1 as an example of a radio communication system consists of a multiplicity of mobile

switching centers MSC which are networked together and, respectively, establish access to a landline network PSTN. These mobile switching centers MSC are also connected to in each case at least one facility RNM for allocating radio resources. Each of these facilities RNM, in turn, provides for a connection to at least one base station BS.

Such a base station BS can set up a connection to subscriber stations, e.g. mobile stations MS or other mobile and stationary terminals via a radio interface. Each base station BS forms at least one radio cell. Figure 1 shows a connection V transmitting user information between a base station BS and a mobile station MS. A system for transmission power control of the radio link via this radio interface will be explained later, only the transmission power adjustment of the mobile station MS being shown. Equivalent measures can be used for the reverse direction of transmission.

An operation and maintenance center OMC effects control and maintenance functions for the mobile radio system or parts thereof. The functionality of this structure can be transferred to other radio communication systems in which the invention can be used, especially for subscriber access networks with wireless subscriber access.

The transmission power control is shown for radio transmission in the up-link UL. Transmission means TX of the mobile station MS send information in the up-link UL, a transmission power correction instruction TPC being taken into consideration for adjusting the transmission power. This transmission power correction instruction TPC is produced by receiving means RX in the base station BS receiving the transmissions of the mobile station MS and control means MPC determining the transmission power correction instruction TPC which is then transmitted to the mobile station MS in the down-link DL.

The transmission power of the mobile station MS is not changed arbitrarily but in increments. If the mobile station MS has been previously transmitting with a transmission power Px, the transmission power control either increases or reduces this transmission power for the subsequent transmission. If a transmission error occurs, the transmission power is maintained. Signaling the transmission power correction instruction TPC from the base station BS to the mobile station MS provides information on which of the three cases applies. However, the increase or decrease is only done with an increment ΔTPC which is not arbitrary but is predetermined. According to the invention, this increment ΔTPC is subscriber-dependent and time-dependent.

Three methods can be used for establishing the increment ΔTPC which, together with the transmission power correction instruction TPC and the previous transmission power, provides an unambiguous rule for adjusting the transmission power:

Method 1:

The increment ΔTPC to be used is also signaled. As long as no change in the increment ΔTPC is announced, the current increment ΔTPC is retained. The speed with which an increment ΔTPC can be newly set thus depends on the signaling capabilities.

Method 2:

The increment ΔTPC currently to be used is implicitly contained in the transmission power correction instruction TPC by means of appropriate coding. As shown in ETSI STC SMG2 UMTS-L1, Tdoc SMG2 UMTS-L1 221/98 of 25.8.1998, pages 29-30, the transmission power correction instruction, which only needs one bit (power + (increased) or power - (reduced)) is coded with two bits according to the prior art. The additional signaling of the increment

ΔTPC can be done either by using more than two bits for signaling or by reducing the redundancy in the signaling.

Method 3:

The increment ΔTPC to be used is firmly tied to certain events or transmission modes which are called transmission conditions in the text which follows. The link between transmission condition and increment ΔTPC is stored in an allocation table which is binding to both radio stations MS, BS.

In the text which follows, the determination of the increment ΔTPC is explained for some transmission conditions which previously produced an unsatisfactory control characteristic for the transmission power.

"slotted mode"

The so-called "slotted mode" in the FDD (frequency division duplex) mode, see also ETSI STC SMG2 UMTS-L1, Tdoc SMG2 UMTS-L1 221/98 of 25.8.1998, pages 33-34, describes an interruption of an otherwise continuous transmission for measuring purposes to prepare, for example, a hand over of the mobile station MS to another base station BS. The interruption can occur in the up-link or the down-link. During the period of the interruption, the control loop is not effective so that on resumption of transmission, the transmission power previously set often deviates greatly from the optimum. To provide fast correction of the transmission power, the increment ΔTPC is temporarily increased after the interruption. Advantageously, the longer the interruption lasts the greater the increase.

According to Figure 2a, an increment ΔTPC of 0.5 dB normally applies which is increased to 1.5 dB with an interruption of 5 ms for three time slots or to 2.0 dB with an interruption of 10 ms before ΔTPC = 0.5 dB again applies. This is predetermined according to Method 1 and thus

known both to the mobile station MS and the base station BS.

As an alternative, the increment ΔTPC to be used subsequently can also be signaled in the signaling announcing the "slotted mode" according to Figure 2b. The increment can be set in dependence on the duration of the interruption. Either the duration of validity of the altered increment ΔTPC is predetermined, e.g. time slots, or contained in the signaling. A further possibility is shown in Figure 2c where an expanded TPC coding, i.e. the implicit transmission of the increment ΔTPC together with the transmission power correction instruction TPC is used for providing for larger steps in the transmission power correction for a period of three time slots or the rest of a frame.

Asymmetry with TDD

The TDD (time division duplex) mode of the radio communication system can assign time slots of a frame in a frequency band optionally to the up-link or to the down-link. Thus, the transmission capacity can be distributed to the up-link or the down-link in accordance with demand so that asymmetric services are also supported well with optimum resource utilization. However, the asymmetry of the traffic also influences the control loop for the transmission power. In contrast to the FDD mode, there is not the possibility of planning predictable delays in the signaling of the transmission power correction instruction TPC due to the common frequency band for up-link and down-link. The greater the asymmetry, the less the capability of the control loop to follow fast changes in the transmission conditions.

In consequence, the increment ΔTPC is determined in dependence on the asymmetry. With great asymmetry, a greater increment ΔTPC than with less asymmetry is established for accelerating the transmission power control according to Figure 3. With

little asymmetry, the increment ΔTPC is smaller for improving the accuracy of control. According to figure 3, method 3 is to be preferred. However, signaling according to method 1 is also possible since the asymmetry can only be changed in relatively great time intervals and there is relevant signaling in every case.

Speed of the mobile station

The so-called "fast fading" describes changes in the transmission conditions of the radio interface and its speed increases with increasing speed of the mobile station MS. Since even a fast transmission power control operates with a temporarily fixed increment ΔTPC, the effectiveness of a large increment ΔTPC decreases again with increasing speed of the mobile station MS. This is why, according to figure 4, a small increment ΔTPC of e.g. 0.5 dB is established both with low speeds and with high speeds and a larger increment ΔTPC of e.g. 1 dB is preferred at medium speeds. At low speeds, the accuracy of the transmission power control is good, and at medium speed the fast tracking of the transmission power for compensating for the fading is predominant. To establish the increment ΔTPC, method 1, i.e. the signaling of the increment ΔTPC by the base station BS to the mobile station MS is preferably used since the speed of the mobile station MS is estimated in the base station BS.

Diversity gain/fading variance

The dips in the received power produced by fast fading are limited by each diversity gain. Each diversity gain thus reduces the variance in the transmission power. The more diversity gains there are, the more the increment ΔTPC can be reduced. The diversity gain increases with

- an increase in the number of echoes used in the channel impulse response,

- an increase in the number of independent transmitting and receiving antennas,
- an increase in the length of time averaging by means of spreading or interleaving.

In comparison with the transmission of the transmission power correction instruction TPC, these measures are taken more rarely so that method 1 (signaling) is to be preferred. Figure 5 specifies an example for utilizing a different number of receiving antennas. If more than one receiving antenna is used, there is receiving antenna diversity. If the receiving end uses more than one antenna, a smaller increment ΔTPC can be used at the transmitting end. The increment ΔTPC is reduced by e.g. 0.25 dB per signaling.

"soft handover"

The so-called soft handover describes a transmission condition in which a mobile station MS is not only in radio contact with one base station BS but, at least temporarily, with at least one further base station BS. During the soft handover, the information of the mobile station MS is received by more than one base station BS and, respectively, the information is transmitted by more than one base station BS, both in the up-link and in the down-link. The base stations BS responsible for a mobile station MS are entered in an active set. Thus, every time when a base station BS has been accepted in the active set or has been removed from it, there is an abrupt change in the macro diversity gain in the up-link and the down-link and in the total transmission power in the down-link. The transmission power adjustment should be able to follow this as quickly as possible.

If the active set is expanded, the transmission power should be reduced as quickly as possible so that the system is not unnecessarily loaded with interference. If the active set is reduced, the transmission powers should be raised quickly in order to ensure adequate signal quality.

In both cases, the increment ΔTPC is temporarily increased. It is then advantageous to increase the increment ΔTPC only in the direction of a reduction of the transmission power (- TPC) in the case of an expansion of the active set and to increase the increment ΔTPC only in the direction of an increase in the transmission power (+ TPC) in the case of a reduction of the active set. The change in the increment ΔTPC can be greater in the down-link since in this case the total transmission power is also changed in addition to the diversity gain.

According to Figures 6a, 6b, 6c, all three methods can be used, the increase in the increment ΔTPC only being applied for a limited period, e.g. two time slots or the remainder of the frame. After that, the most accurate possible transmission power setting with small increment ΔTPC should again be used.

Since the expansion or reduction of the active set is signaled by the base station BS, the increment ΔTPC can thus be established for the mobile station MS in accordance with a correspondence table, see Figure 6a. As an alternative, the change can be signaled in accordance with Figure 6b or the transmission power adjustment can be improved by changing the coding of the transmission power correction instruction TPC according to Figure 6c.

According to Figure 7, the transmission power control for a transmission in the up-link can be described in a simplified way as follows:

After a connection has been set up, the transmission condition is determined by the control means MPC of the base station BS. Transmission in the up-link UL takes place by means of the transmission means TX of the mobile station MS. These transmissions are received by receiving means RX of the base station BS. Furthermore, the control means MPC interrogate whether the transmission condition has changed in the meantime. If so, the

increment ΔTPC is newly determined and, if not, the increment ΔTPC set at the beginning of the connection is retained. Furthermore, the control means MPC determine the transmission power correction instruction TPC so that the transmission power correction instruction can be transmitted to the mobile station MS in the down link DL by transmission means TX of the base station BS.

The mobile station MS receives the transmission power correction instruction TPC and adjusts the transmission power appropriately for subsequent transmissions, taking into consideration the increment ΔTPC at the same time. The increment ΔTPC was either contained in the transmission power correction instruction TPC according to method 2, was signaled according to method 1, or could be reconstructed from the present transmission condition by the mobile station MS in accordance with method 3.

Patent claims

1. A method for controlling power in a radio communication system having a radio interface between a first and second radio station (BS, MS), in which

- the transmissions of the second radio station (MS, BS) are received in the first radio station (BS, MS) and a transmission power correction instruction (TPC) is determined for the transmission power of the second radio station (MS, BS),

- the transmission power correction instruction (TPC) is transmitted to the second radio station (MS, BS) during a subsequent transmission of the first radio station (BS, MS)

- the second radio station (MS, BS) takes the transmission power correction instruction (TPC) into consideration for adjusting the transmission power during one of its subsequent transmissions,

- the transmission power correction instruction (TPC) is referred to a variable increment (ΔTPC) of the transmission power adjustment which is adjusted by the radio stations (BS, MS) in a subscriber-dependent and time-dependent manner,

- and a condition of the transmission between the radio stations is evaluated repetitively in time in the radio stations (BS, MS),

characterized in that

- the transmission condition is an interruption of a continuous transmission for measuring purposes,

- and the increment of the transmission power adjustment is temporarily increased after the end of the interruption.

2. The method as claimed in claim 1, in which the measure of the increase of the increment is dependent on the length of the interruption.

3. A method for controlling power in a radio communication system having a radio interface between a first and second radio station (BS, MS), in which

- the transmissions of the second radio station (MS, BS) are received in the first radio station (BS, MS) and a

transmission power correction instruction (TPC) is determined for the transmission power of the second radio station (MS, BS),

- the transmission power correction instruction (TPC)
- is transmitted to the second radio station (MS, BS) during a subsequent transmission of the first radio station (BS, MS),
- the second radio station (MS, BS) takes the transmission power correction instruction (TPC) into consideration for adjusting the transmission power during one of its subsequent transmissions,
- a condition of the transmission between the radio stations is evaluated repetitively in time in the radio station (BS, MS),
- and the transmission condition is a speed of the first or a second radio station,

characterized in that the increment is greater in a medium range of the speed than in a high range of the speed.

4. The method as claimed in claim 3, in which the increment is also greater in the medium range of the speed than in a low range of the speed.

5. A method for controlling power in a radio communication system having a radio interface between a first and second radio station (BS, MS), in which

- the transmissions of the second radio station (MS, BS) are received in the first radio station (BS, MS) and a transmission power correction instruction (TPC) is determined for the transmission power of the second radio station (MS, BS),
- the transmission power correction instruction (TPC) is transmitted to the second radio station (MS, BS) during a subsequent transmission of the first radio station (BS, MS)
- the second radio station (MS, BS) takes the transmission power correction instruction (TPC) into

consideration for adjusting the transmission power during one of its subsequent transmissions,

- the transmission power correction instruction (TPC) is referred to a variable increment (ΔTPC) of the transmission power adjustment which is adjusted by the radio stations (BS, MS) in a subscriber-dependent and time-dependent manner,

- and a condition of the transmission between the radio stations is evaluated repetitively in time in the radio stations (BS, MS), characterized in that

- the transmission condition is the number of transmitting and/or receiving antennas used for a connection,
- and the increment is changed in the case of a change of the number of transmitting and/or receiving antennas used for a connection.

6. The method as claimed in claim 5, characterized in that the number of the antennas used for the connection is changed by changing the number of the base stations (BS) which are in radio contact with the subscriber station (MS) in the case of a macro diversity transmission method.

7. The method as claimed in claim 6, in which the increment is only increased for reducing the transmission power in the case of an increase in the number of base stations which are in radio contact with the subscriber station.

8. The method as claimed in claim 6, in which the increment is only increased for increasing the transmission power in the case of a reduction in the number of base stations which are in radio contact with the subscriber station.

9. The method as claimed in one of the preceding claims, characterized in that a

CDMA transmission method in broadband transmission channels is used for the radio interface.

10. The method as claimed in one of the preceding claims, characterized in that the first radio station is a base station (BS) and the second radio station is a subscriber station (MS).

11. The method as claimed in one of claims 1 to 9, characterized in that the first radio station is a subscriber station (MS) and the second radio station is a base station (BS).

12. The method as claimed in one of the preceding claims, characterized in that the increment (ΔTPC) to be used is signaled.

13. The method as claimed in one of claims 1 to 11, characterized in that the increment (ΔTPC) to be used is determined by the transmitted transmission power correction instruction (TPC).

14. The method as claimed in one of claims 1 to 11, characterized in that the increment (ΔTPC) to be used is established in accordance with a correspondence table or calculation rule linking the different transmission conditions with the increments (ΔTPC) to be used.

Fig. 1

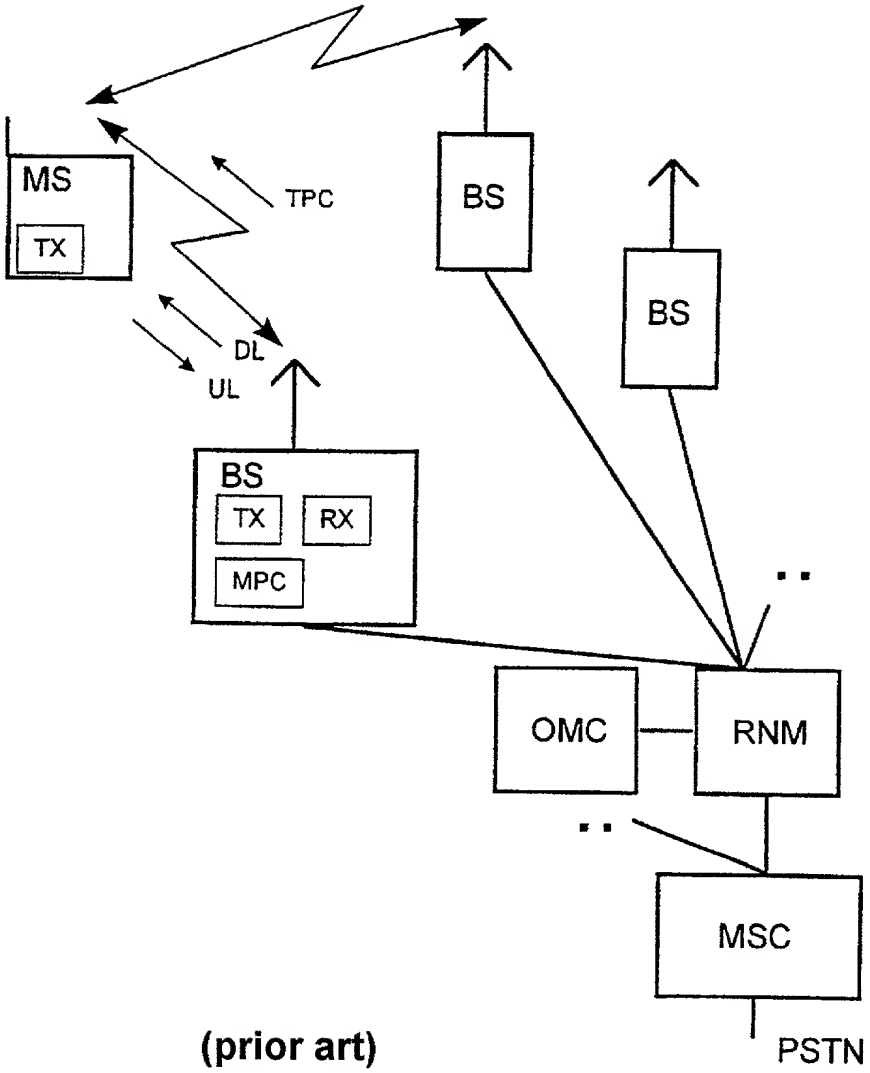

(prior art)

Fig. 2a

Method 3

Normal mode	e.g. ΔTPC=0.5 dB
slotted mode with 5 ms interruption	e.g. ΔTPC=1.5 dB for three time slots, then 0.5 dB again
slotted mode with 10 ms interruption	e.g. ΔTPC=2.0 dB for three time slots, then 0.5 dB again

Fig. 2b

Method 2

Normal mode	e.g. ΔTPC=0.5 dB
slotted mode with 5 ms interruption	ΔTPC announced in the signaling of the slotted mode for the agreed time, then 0.5 dB again
slotted mode with 10 ms interruption	ΔTPC announced in the signaling of the slotted mode for the agreed time, then 0.5 dB again

Fig. 2c

Method 1

Normal mode	e.g. ΔTPC=0.5 dB with normal TPC coding
slotted mode with 5 ms interruption	Use expanded TPC coding for e.g. three time slots or the remainder of the frame after the interruption
slotted mode with 10 ms interruption	Use expanded TPC coding for e.g. three time slots or the remainder of the frame after the interruption

Fig. 3

Time slot in DL	Time slot in UL	ΔTPC
15	1	2 dB
..	..	..
8	8	0,5 dB
.	..	..
2	14	2 dB

Fig. 4

estimated speed of MS	signaled ΔTPC
0 - 20 km/h	0,5 dB
20 - 80 km/h	1 dB
> 80 km/h	0,5 dB

Fig. 5

RX antenna diversity	Change in ΔTPC in MS (signaled)	Change in ΔTPC in BS
BS	-0,25 dB	0
MS	0	-0,25 dB
BSandMS	-0,25 dB	-0,25 dB

Fig. 6a

Method 3

	ΔTPC in BS	ΔTPC in BS	ΔTPC in MS	ΔTPC in MS
	+ TPC	- TPC	+ TPC	- TPC
Normal mode	0,5 dB	0,5 dB	0,5 dB	0,5 dB
Expansion of "active set"	0,5 dB	**2.0 dB for two time slots, then 0.5 d.B**	0,5 dB	**1.0 dB for two time slots, then 0.5 dB**
Reduction of "active set"	**2.0 dB for two time slots, then 0.5 d.B**	0,5 dB	**1.0 dB for two time slots, then 0.5 dB**	0,5 dB

Fig. 6b

Method 1

	ΔTPC in BS	ΔTPC in BS	ΔTPC in MS	ΔTPC in MS
	+ TPC	- TPC	+ TPC	- TPC
Normal mode	**e.g.** 0,5 dB	**e.g.** 0,5 dB	**e.g.** 0,5 dB	**e.g.** 0,5 dB
Expansion of "active set"	**e.g.** 0,5 dB	**e.g.2.0 dB for two time slots, then 0.5 d.B**	**e.g.** 0,5 dB	**is signaled**
Reduction of "active set"	**e.g.2.0 dB for two time slots, then 0.5 d.B**	**e.g.** 0,5 dB	**is signaled**	**e.g.** 0,5 dB

Fig. 6c

Method 2

	ΔTPC in BS	ΔTPC in BS	ΔTPC in MS	ΔTPC in MS
	+ TPC	- TPC	+ TPC	- TPC
Normal mode	**e.g.** 0,5 dB	**e.g.** 0,5 dB	**e.g.** 0,5 dB	**e.g.** 0,5 dB
Expansion and reduction of "active set"	**use expanded TPC coding for e.g. 2 time slots or remainder of the frame after the interruption**	**(see ΔTPC and +TPC in BS)**	**(see ΔTPC and +TPC in BS)**	**(see ΔTPC and +TPC in BS)**

Fig. 7

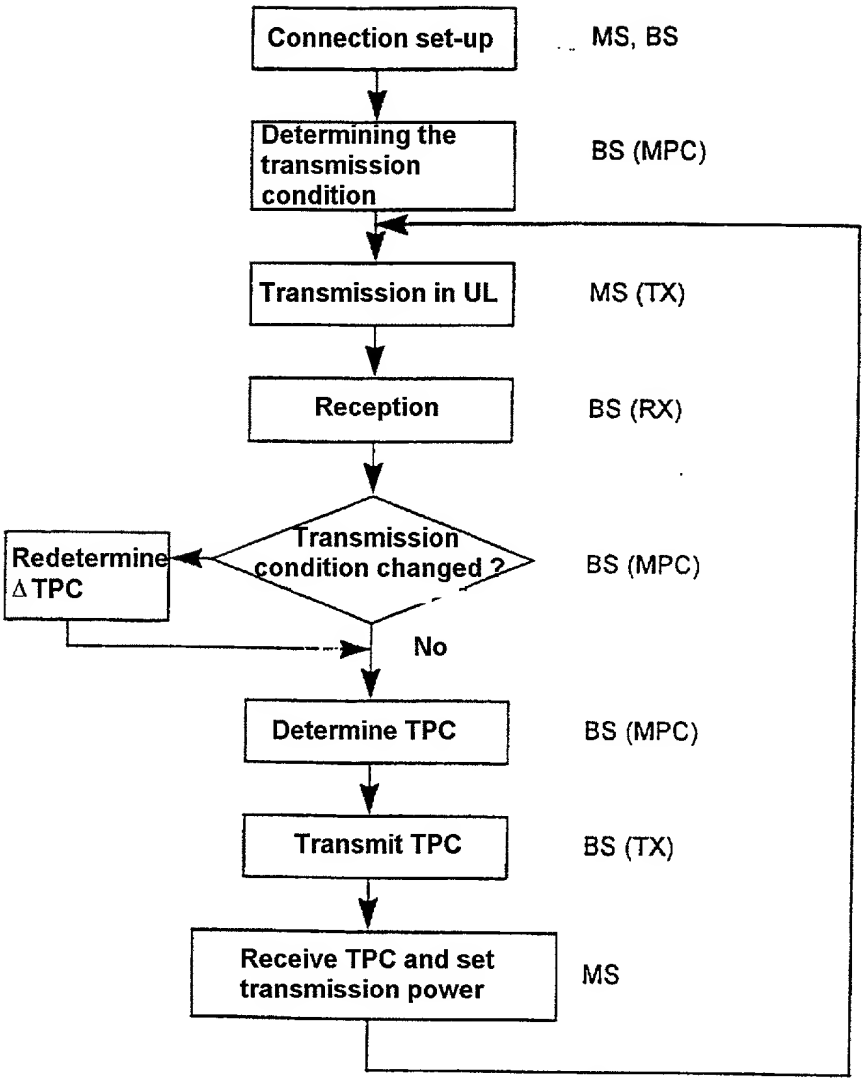
Connection set-up
MS, BS
Determining the transmission condition
BS (MPC)
Transmission in UL
MS (TX)
Reception
BS (RX)
Transmission condition changed ?
BS (MPC)
Redetermine ΔTPC
No
Determine TPC
BS (MPC)
Transmit TPC
BS (TX)
Receive TPC and set transmission power
MS

Declaration and Power of Attorney For Patent Application

Erklärung Für Patentanmeldungen Mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Verfahren und Funk-Kommunikationssystem zur Leistungsregelung zwischen einer Basisstation und einer Teilnehmerstation

Method and radio communication system for regulating power between a base station and a subscriber station

deren Beschreibung

(zutreffendes ankreuzen)
☐ hier beigefügt ist.
☒ am 08.10.1999 als
PCT internationale Anmeldung
PCT Anmeldungsnummer PCT/DE99/03249
eingereicht wurde und am ____________
abgeändert wurde (falls tatsächlich abgeändert).

the specification of which

(check one)
☐ is attached hereto.
☒ was filed on 08.10.1999 as
PCT international application
PCT Application No. PCT/DE99/03249
and was amended on ____________
(if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

German Language Declaration

Prior foreign appplications
Priorität beansprucht

			Priority Claimed	
19846675.7	DE	09.10.1998	☒	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein
			☐	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein
			☐	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozeßordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35. United States Code. §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occured between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE99/03249	08.10.1999		
(Application Serial No.) (Anmeldeseriennummer)	(Filing Date D, M, Y) (Anmeldedatum T, M, J)	(Status) (patentiert, anhängig, aufgegeben)	(Status) (patented, pending, abandoned)
(Application Serial No.) (Anmeldeseriennummer)	(Filing Date D,M,Y) (Anmeldedatum T, M; J)	(Status) (patentiert, anhängig, aufgeben)	(Status) (patented, pending, abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: *(Name und Registrationsnummer anführen)*

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

And I hereby appoint

Customer No. 26161

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: *(name and telephone number)*

Ext. _____

Postanschrift:

Send Correspondence to:

Fish & Richardson P.C.
225 Franklin Street 02110-2804 Boston, MA
Telephone: +1 617-542 5070 and Facsimile +1 617-542 8906
or
Customer No. 26161

Voller Name des einzigen oder ursprünglichen Erfinders: MICHAEL BENZ	Full name of sole or first inventor: MICHAEL BENZ
Unterschrift des Erfinders Datum 23.03.01	Inventor's signature Date
Wohnsitz BERLIN, DEUTSCHLAND	Residence BERLIN, GERMANY DEX
Staatsangehörigkeit DE	Citizenship DE
Postanschrift SCHUCKERTDAMM 328 13629 BERLIN	Post Office Addess SCHUCKERTDAMM 328 13629 BERLIN
Voller Name des zweiten Miterfinders (falls zutreffend): MICHAEL FAERBER	Full name of second joint inventor, if any: MICHAEL FAERBER
Unterschrift des Erfinders Datum 26. März 01	Second Inventor's signature Date
Wohnsitz WOLFRATSHAUSEN, DEUTSCHLAND DEX	Residence WOLFRATSHAUSEN, GERMANY
Staatsangehorigkeit DE	Citizenship DE
Postanschrift SCHIESSSTAETTSTR. 12A 82515 WOLFRATSHAUSEN	Post Office Address SCHIESSSTAETTSTR. 12A 82515 WOLFRATSHAUSEN

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

Voller Name des dritten Miterfinders:	Full name of third joint inventor:
FRANZ GOLDHOFER	FRANZ GOLDHOFER
Unterschrift des Erfinders — Datum: F. Goldhof 19.4.01	Inventor's signature — Date
Wohnsitz: WAAKIRCHEN, DEUTSCHLAND DEX	Residence: WAAKIRCHEN, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: STAUDACH 41 83666 WAAKIRCHEN	Post Office Address: STAUDACH 41 83666 WAAKIRCHEN

Voller Name des vierten Miterfinders:	Full name of fourth joint inventor:
Dr. ANJA KLEIN	Dr. ANJA KLEIN
Unterschrift des Erfinders — Datum: Anja Klein 21.03.01	Inventor's signature — Date
Wohnsitz: BERLIN, DEUTSCHLAND DEX	Residence: BERLIN, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: PADERBORNER STR. 8 10709 BERLIN	Post Office Address: PADERBORNER STR. 8 10709 BERLIN

Voller Name des fünften Miterfinders:	Full name of fifth joint inventor:
REINHARD KOEHN	REINHARD KOEHN
Unterschrift des Erfinders — Datum: Reinhard Koehn 7.3.01	Inventor's signature — Date
Wohnsitz: BERLIN, DEUTSCHLAND DEX	Residence: BERLIN, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: HOMBURGER STR. 21 14197 BERLIN	Post Office Address: HOMBURGER STR. 21 14197 BERLIN

Voller Name des sexten Miterfinders:	Full name of sixth joint inventor:
MEIK KOTTKAMP	MEIK KOTTKAMP
Unterschrift des Erfinders — Datum: Meik Kottkamp 12/03/01	Inventor's signature — Date
Wohnsitz: BERLIN, DEUTSCHLAND DEX	Residence: BERLIN, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: SCHUSTEHRUSSTR. 42 10585 BERLIN	Post Office Address: SCHUSTEHRUSSTR. 42 10585 BERLIN

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

Voller Name des siebten Miterfinders:	Full name of seventh joint inventor:
Dr. JOERN KRAUSE	Dr. JOERN KRAUSE
Unterschrift des Erfinders — Datum: Jörn Krause 13.3.2001	Inventor's signature — Date
Wohnsitz: BERLIN, DEUTSCHLAND DEX	Residence: BERLIN, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: FREIBERGSTR. 28-30, 12107 BERLIN	Post Office Address: FREIBERGSTR. 28-30, 12107 BERLIN
Voller Name des achten Miterfinders (falls zutreffend): Dr. HOLGER LANDENBERGER	Full name of eighth joint inventor, if any: Dr. HOLGER LANDENBERGER
Unterschrift des Erfinders — Datum: 3.05.01	Inventor's signature — Date
Wohnsitz: BOCHOLT, DEUTSCHLAND DEX	Residence: BOCHOLT, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: FASANENSTIEGE 1A, 46395 BOCHOLT	Post Office Address: FASANENSTIEGE 1A, 46395 BOCHOLT
Voller Name des neunten Miterfinders (falls zutreffend): SEBASTIAN OBERMANNS	Full name of nineth joint inventor, if any: SEBASTIAN OBERMANNS
Unterschrift des Erfinders — Datum: Sebastian Ob 03.05.01	Inventor's signature — Date
Wohnsitz: BOCHOLT, DEUTSCHLAND DEX	Residence: BOCHOLT, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: IM PARK 5, 46395 BOCHOLT	Post Office Address: IM PARK 5, 46395 BOCHOLT
Voller Name des zehnten Miterfinders (falls zutreffend): Dr. STEFAN OESTREICH	Full name of tenth joint inventor, if any: Dr. STEFAN OESTREICH
Unterschrift des Erfinders — Datum: 17.4.01	Inventor's signature — Date
Wohnsitz: HOLZKIRCHEN, DEUTSCHLAND DEX	Residence: HOLZKIRCHEN, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: AUSTRASSE 18, 83607 HOLZKIRCHEN	Post Office Address: AUSTRASSE 18, 83607 HOLZKIRCHEN

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).